

**SMF5.0(C)A
 THRU
 SMF170(C)A**

**200WATTS TRANSIENT
 VOLTAGE SUPPRESSOR
 5.0 TO 170 VOLTS**

Features

- Halogen free available upon request by adding suffix "-HF"
- Stand-off Voltage 5-170 Volts
- Uni and bi-directional type available (suffix "C" means bi-directional)
- Surface Mount
- Low Clamping Voltage
- 200 Watt Peak Power Dissipation
- Small, High Thermal Efficiency
- Marking Code: See Electrical Characteristics Table
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Lead Free Finish/RoHS Compliant (NOTE 1) ("P" Suffix designates RoHS Compliant. See ordering information)


Maximum Ratings

- Operating Temperature: -65°C to +175°C
- Storage Temperature: -65°C to +175°C

Electrical Characteristics @ 25°C Unless Otherwise Specified

| | | |
|--|------------------|-------|
| Peak Pulse Power (10/1000us Waveform) | P _{PP} | 200W |
| ESD Voltage(HBM) | V _{ESD} | >16KV |

Note: 1. High Temperature Solder Exemption Applied, see EU Directive Annex Notes 7

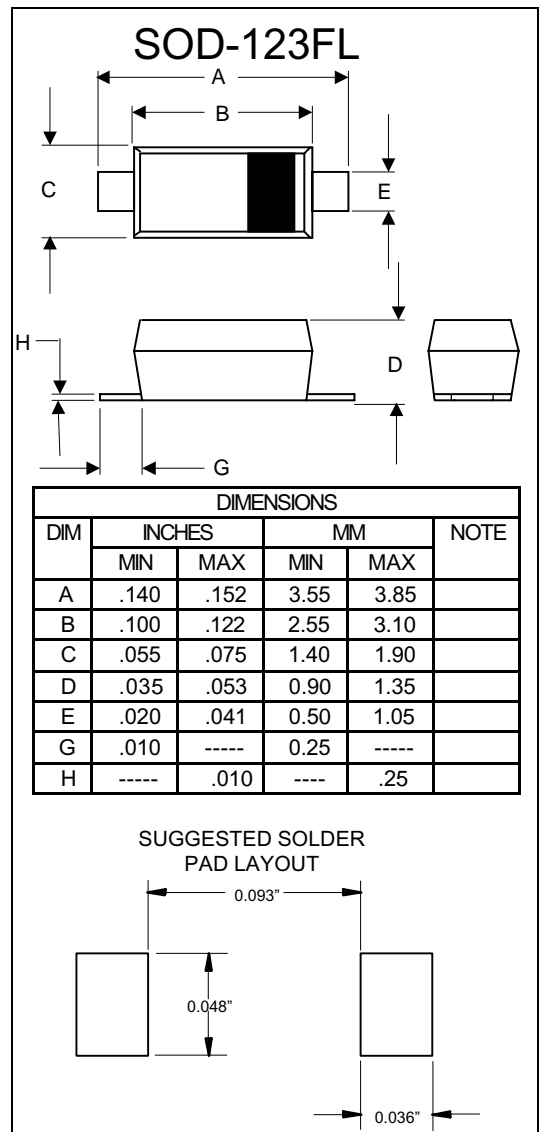

SMF5.0A THRU SMF170A

ELECTRICAL CHARACTERISTICS @25°C

| MCC PART NUMBER Uni-Polar | Marking Code | Breakdown Voltage $V_{BR} @ I_T$ (Volt) | | TEST CURRENT I_T mADC | RATED STANDOFF VOLTAGE V_{WM} V | MAXIMUM REVERSE LEAKAGE $I_b @ V_{WM}$ (μA) | MAXIMUM CLAMPING VOLTAGE $V_C @ I_{PP}$ V | MAXIMUM PEAK PULSE CURRENT I_{PP} A |
|---------------------------------|-----------------|--|------|--------------------------------------|---|--|---|--|
| | | MIN | MAX | | | | | |
| SMF5.0A | 5.0A / KE | 6.4 | 7.0 | 10 | 5.0 | 400 | 9.2 | 21.7 |
| SMF6.0A | 6.0A / KG | 6.67 | 7.37 | 10 | 6.0 | 400 | 10.3 | 19.4 |
| SMF6.5A | 6.5A / KK | 7.22 | 7.98 | 10 | 6.5 | 250 | 11.2 | 17.9 |
| SMF7.0A | 7.0A / KM | 7.78 | 8.6 | 10 | 7.0 | 100 | 12 | 16.7 |
| SMF7.5A | 7.5A / KP | 8.33 | 9.21 | 1.0 | 7.5 | 50 | 12.9 | 15.5 |
| SMF8.0A | 8.0A / KR | 8.89 | 9.83 | 1.0 | 8.0 | 25 | 13.6 | 14.7 |
| SMF8.5A | 8.5A / KT | 9.44 | 10.4 | 1.0 | 8.5 | 10 | 14.4 | 13.9 |
| SMF9.0A | 9.0A / KV | 10 | 11.1 | 1.0 | 9.0 | 5.0 | 15.4 | 13 |
| SMF10A | 10A / KX | 11.1 | 12.3 | 1.0 | 10 | 2.5 | 17 | 11.8 |
| SMF11A | 11A / KZ | 12.2 | 13.5 | 1.0 | 11 | 2.5 | 18.2 | 11 |
| SMF12A | 12A / LE | 13.3 | 14.7 | 1.0 | 12 | 2.5 | 19.9 | 10.1 |
| SMF13A | 13A / LG | 14.4 | 15.9 | 1.0 | 13 | 1.0 | 21.5 | 9.3 |
| SMF14A | 14A / LK | 15.6 | 17.2 | 1.0 | 14 | 1.0 | 23.2 | 8.6 |
| SMF15A | 15A / LM | 16.7 | 18.5 | 1.0 | 15 | 1.0 | 24.4 | 8.2 |
| SMF16A | 16A / LP | 17.8 | 19.7 | 1.0 | 16 | 1.0 | 26 | 7.7 |
| SMF17A | 17A / LR | 18.9 | 20.9 | 1.0 | 17 | 1.0 | 27.6 | 7.2 |
| SMF18A | 18A / LT | 20 | 22.1 | 1.0 | 18 | 1.0 | 29.2 | 6.8 |
| SMF20A | 20A / LV | 22.2 | 24.5 | 1.0 | 20 | 1.0 | 32.4 | 6.2 |
| SMF22A | 22A / LX | 24.4 | 26.9 | 1.0 | 22 | 1.0 | 35.5 | 5.6 |
| SMF24A | 24A / LZ | 26.7 | 29.5 | 1.0 | 24 | 1.0 | 38.9 | 5.1 |
| SMF26A | 26A / ME | 28.9 | 31.9 | 1.0 | 26 | 1.0 | 42.1 | 4.8 |
| SMF28A | 28A / MG | 31.1 | 34.4 | 1.0 | 28 | 1.0 | 45.4 | 4.4 |
| SMF30A | 30A / MK | 33.3 | 36.8 | 1.0 | 30 | 1.0 | 48.4 | 4.1 |
| SMF33A | 33A / MM | 36.7 | 40.6 | 1.0 | 33 | 1.0 | 53.3 | 3.8 |
| SMF36A | 36A / MP | 40 | 44.2 | 1.0 | 36 | 1.0 | 58.1 | 3.4 |
| SMF40A | 40A / MR | 44.4 | 49.1 | 1.0 | 40 | 1.0 | 64.5 | 3.1 |
| SMF43A | 43A / MT | 47.8 | 52.8 | 1.0 | 43 | 1.0 | 69.4 | 2.9 |
| SMF45A | 45A / MV | 50 | 55.3 | 1.0 | 45 | 1.0 | 72.7 | 2.8 |
| SMF48A | 48A / MX | 53.3 | 58.9 | 1.0 | 48 | 1.0 | 77.4 | 2.6 |
| SMF51A | 51A / MZ | 56.7 | 62.7 | 1.0 | 51 | 1.0 | 82.4 | 2.4 |
| SMF54A | 54A / NE | 60 | 66.3 | 1.0 | 54 | 1.0 | 87.1 | 2.3 |
| SMF58A | 58A / NG | 64.4 | 71.2 | 1.0 | 58 | 1.0 | 93.6 | 2.1 |
| SMF60A | 60A / NK | 66.7 | 73.7 | 1.0 | 60 | 1.0 | 96.8 | 1.8 |
| SMF64A | 64A / NM | 71.1 | 78.6 | 1.0 | 64 | 1.0 | 103 | 1.7 |
| SMF70A | 70A / NP | 77.8 | 86 | 1.0 | 70 | 1.0 | 113 | 1.5 |
| SMF75A | 75A / NR | 83.3 | 92.1 | 1.0 | 75 | 1.0 | 121 | 1.4 |
| SMF78A | 78A / NT | 86.7 | 95.8 | 1.0 | 78 | 1.0 | 126 | 1.4 |
| SMF85A | 85A / NV | 94.4 | 104 | 1.0 | 85 | 1.0 | 137 | 1.3 |
| SMF90A | 90A / NX | 100 | 111 | 1.0 | 90 | 1.0 | 146 | 1.2 |
| SMF100A | 100 / NZ | 111 | 123 | 1.0 | 100 | 1.0 | 162 | 1.1 |
| SMF110A | 110 / PE | 122 | 135 | 1.0 | 110 | 1.0 | 177 | 1.0 |
| SMF120A | 120 / PG | 133 | 147 | 1.0 | 120 | 1.0 | 193 | 0.9 |
| SMF130A | 130 / PK | 144 | 159 | 1.0 | 130 | 1.0 | 209 | 0.8 |
| SMF150A | 150 / PM | 167 | 185 | 1.0 | 150 | 1.0 | 243 | 0.7 |
| SMF160A | 160 / PP | 178 | 197 | 1.0 | 160 | 1.0 | 259 | 0.7 |
| SMF170A | 170 / PR | 189 | 209 | 1.0 | 170 | 1.0 | 275 | 0.6 |

SMF5.0CA THRU SMF170CA

ELECTRICAL CHARACTERISTICS @25°C

| MCC PART NUMBER Bi-Polar | Marking Code | Breakdown Voltage $V_{BR} @ I_T$ (Volt) | | TEST CURRENT I_T mADC | RATED STANDOFF VOLTAGE V_{WM} V | MAXIMUM REVERSE LEAKAGE $I_b @ V_{WM}$ (μA) | MAXIMUM CLAMPING VOLTAGE $V_C @ I_{PP}$ V | MAXIMUM PEAK PULSE CURRENT I_{PP} A |
|--------------------------------|-----------------|--|------|--------------------------------------|---|--|---|--|
| | | MIN | MAX | | | | | |
| SMF5.0CA | 5.0CA / AE | 6.4 | 7.0 | 10 | 5.0 | 400 | 9.2 | 21.7 |
| SMF6.0CA | 6.0CA / AG | 6.67 | 7.37 | 10 | 6.0 | 400 | 10.3 | 19.4 |
| SMF6.5CA | 6.5CA / AK | 7.22 | 7.98 | 10 | 6.5 | 250 | 11.2 | 17.9 |
| SMF7.0CA | 7.0CA / AM | 7.78 | 8.6 | 10 | 7.0 | 100 | 12 | 16.7 |
| SMF7.5CA | 7.5CA / AP | 8.33 | 9.21 | 1.0 | 7.5 | 50 | 12.9 | 15.5 |
| SMF8.0CA | 8.0CA / AR | 8.89 | 9.83 | 1.0 | 8.0 | 25 | 13.6 | 14.7 |
| SMF8.5CA | 8.5CA / AT | 9.44 | 10.4 | 1.0 | 8.5 | 10 | 14.4 | 13.9 |
| SMF9.0CA | 9.0CA / AV | 10 | 11.1 | 1.0 | 9.0 | 5.0 | 15.4 | 13 |
| SMF10CA | 10CA / AX | 11.1 | 12.3 | 1.0 | 10 | 2.5 | 17 | 11.8 |
| SMF11CA | 11CA / AZ | 12.2 | 13.5 | 1.0 | 11 | 2.5 | 18.2 | 11 |
| SMF12CA | 12CA / BE | 13.3 | 14.7 | 1.0 | 12 | 2.5 | 19.9 | 10.1 |
| SMF13CA | 13CA / BG | 14.4 | 15.9 | 1.0 | 13 | 1.0 | 21.5 | 9.3 |
| SMF14CA | 14CA / BK | 15.6 | 17.2 | 1.0 | 14 | 1.0 | 23.2 | 8.6 |
| SMF15CA | 15CA / BM | 16.7 | 18.5 | 1.0 | 15 | 1.0 | 24.4 | 8.2 |
| SMF16CA | 16CA / BP | 17.8 | 19.7 | 1.0 | 16 | 1.0 | 26 | 7.7 |
| SMF17CA | 17CA / BR | 18.9 | 20.9 | 1.0 | 17 | 1.0 | 27.6 | 7.2 |
| SMF18CA | 18CA / BT | 20 | 22.1 | 1.0 | 18 | 1.0 | 29.2 | 6.8 |
| SMF20CA | 20CA / BV | 22.2 | 24.5 | 1.0 | 20 | 1.0 | 32.4 | 6.2 |
| SMF22CA | 22CA / BX | 24.4 | 26.9 | 1.0 | 22 | 1.0 | 35.5 | 5.6 |
| SMF24CA | 24CA / BZ | 26.7 | 29.5 | 1.0 | 24 | 1.0 | 38.9 | 5.1 |
| SMF26CA | 26CA / CE | 28.9 | 31.9 | 1.0 | 26 | 1.0 | 42.1 | 4.8 |
| SMF28CA | 28CA / CG | 31.1 | 34.4 | 1.0 | 28 | 1.0 | 45.4 | 4.4 |
| SMF30CA | 30CA / CK | 33.3 | 36.8 | 1.0 | 30 | 1.0 | 48.4 | 4.1 |
| SMF33CA | 33CA / CM | 36.7 | 40.6 | 1.0 | 33 | 1.0 | 53.3 | 3.8 |
| SMF36CA | 36CA / CP | 40 | 44.2 | 1.0 | 36 | 1.0 | 58.1 | 3.4 |
| SMF40CA | 40CA / CR | 44.4 | 49.1 | 1.0 | 40 | 1.0 | 64.5 | 3.1 |
| SMF43CA | 43CA / CT | 47.8 | 52.8 | 1.0 | 43 | 1.0 | 69.4 | 2.9 |
| SMF45CA | 45CA / CV | 50 | 55.3 | 1.0 | 45 | 1.0 | 72.7 | 2.8 |
| SMF48CA | 48CA / CX | 53.3 | 58.9 | 1.0 | 48 | 1.0 | 77.4 | 2.6 |
| SMF51CA | 51CA / CZ | 56.7 | 62.7 | 1.0 | 51 | 1.0 | 82.4 | 2.4 |
| SMF54CA | 54CA / DE | 60 | 66.3 | 1.0 | 54 | 1.0 | 87.1 | 2.3 |
| SMF58CA | 58CA / DG | 64.4 | 71.2 | 1.0 | 58 | 1.0 | 93.6 | 2.1 |
| SMF60CA | 60CA / DK | 66.7 | 73.7 | 1.0 | 60 | 1.0 | 96.8 | 1.8 |
| SMF64CA | 64CA / DM | 71.1 | 78.6 | 1.0 | 64 | 1.0 | 103 | 1.7 |
| SMF70CA | 70CA / DP | 77.8 | 86 | 1.0 | 70 | 1.0 | 113 | 1.5 |
| SMF75CA | 75CA / DR | 83.3 | 92.1 | 1.0 | 75 | 1.0 | 121 | 1.4 |
| SMF78CA | 78CA / DT | 86.7 | 95.8 | 1.0 | 78 | 1.0 | 126 | 1.4 |
| SMF85CA | 85CA / DV | 94.4 | 104 | 1.0 | 85 | 1.0 | 137 | 1.3 |
| SMF90CA | 90CA / DX | 100 | 111 | 1.0 | 90 | 1.0 | 146 | 1.2 |
| SMF100CA | 100C / DZ | 111 | 123 | 1.0 | 100 | 1.0 | 162 | 1.1 |
| SMF110CA | 110C / EE | 122 | 135 | 1.0 | 110 | 1.0 | 177 | 1.0 |
| SMF120CA | 120C / EG | 133 | 147 | 1.0 | 120 | 1.0 | 193 | 0.9 |
| SMF130CA | 130C / EK | 144 | 159 | 1.0 | 130 | 1.0 | 209 | 0.8 |
| SMF150CA | 150C / EM | 167 | 185 | 1.0 | 150 | 1.0 | 243 | 0.7 |
| SMF160CA | 160C / EP | 178 | 197 | 1.0 | 160 | 1.0 | 259 | 0.7 |
| SMF170CA | 170C / ER | 189 | 209 | 1.0 | 170 | 1.0 | 275 | 0.6 |

SMF5.0CA THRU SMF170CA

Electrical Characteristics

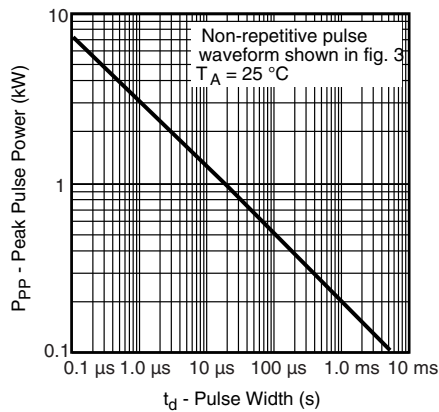


Fig. 1 - Peak Pulse Power Rating

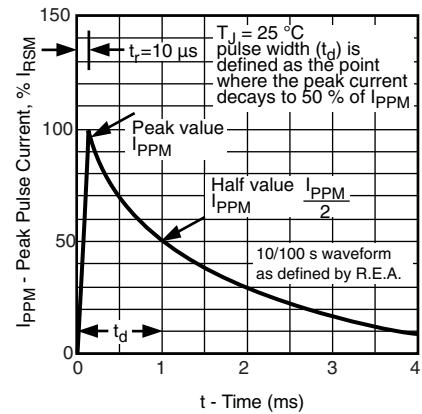


Fig. 3 - Pulse Waveform

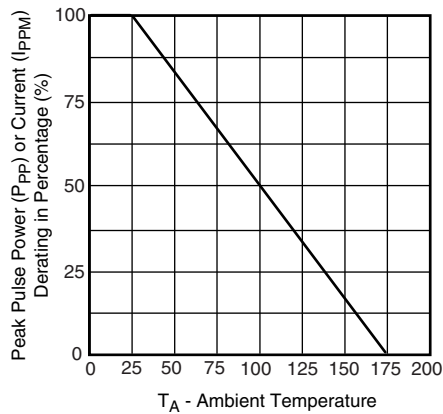


Fig. 2 - Pulse Derating Curve



TM

Micro Commercial Components

Ordering Information :

| Device | Packing |
|----------------|-------------------------|
| Part Number-TP | Tape&Reel: 2.5Kpcs/Reel |

Note : Adding "-HF" suffix for halogen free, eg. Part Number-TP-HF

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp .** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp .** and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

www.mccsemi.com