

Obsolete

M.C.C.

Micro Commercial Components



Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

MCL4148

**500mW 100 Volt
Silicon Epitaxial Diode**

Features

- Lead Free Finish/Rohs Compliant (Note1) ("P" Suffix designates Compliant. See ordering information)
- Silicon epitaxial planar diode
- Fast Switching Speed
- This diode is also available in the DO-35 case with the type designation 1N4148, in the Mini-MELF case with the type designation DL4148

Maximum Ratings

- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C
- Maximum Thermal Resistance; 350°C/W Junction To Ambient
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1

Electrical Characteristics @ 25°C Unless Otherwise Specified


Reverse Voltage	V_R	75V	
Peak Reverse Voltage	V_{RM}	100V	
Maximum Average Rectified Current	I_o	200mA	Resistive Load $f > 50\text{Hz}$
Power Dissipation	P_{TOT}	500mW ¹⁾	$T_A=25^\circ\text{C}$
Junction Temperature	T_J	150°C	
Surge Forward Current	I_{FSM}	2A	$t=1\mu\text{s}, T_J=25^\circ\text{C}$
Maximum Forward Voltage	V_F	1.0V	$I_{FM} = 50\text{mA};$ $T_J = 25^\circ\text{C}^*$
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	25nA 5.0uA 50uA	$V_R=20\text{V}$ $T_J=25^\circ\text{C} V_R=75\text{V},$ $T_J=150^\circ\text{C} V_R=20\text{V}$
Typical Junction Capacitance	C_J	4.0pF	Measured at $V_R=V_F=0\text{V}$
Reverse Recovery Time	T_{rr}	4.0nS	$I_F=10\text{mA},$ $V_R = 6.0\text{V}$ $R_L=100\text{OHMS}$

*Pulse test: Pulse width 300 usec, Duty cycle 2%

1) Valid provided that leads at a distance of 8mm from case are kept at ambient temperature(DO-35)


Note: 1. Lead in Glass Exemption Applied, see EU Directive Annex 7(C)-I.

MICROMELF



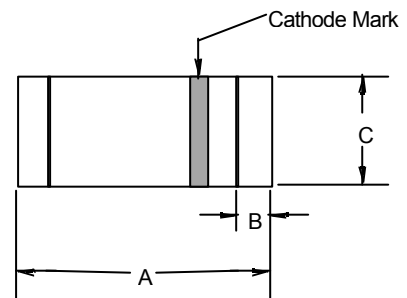


DIM	DIMENSIONS				NOTE
	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	.071	.079	1.8	2.0	
B	.004	.008	.10	.20	
C	.047	.051	1.20	1.30	Ø

SUGGESTED SOLDER PAD LAYOUT

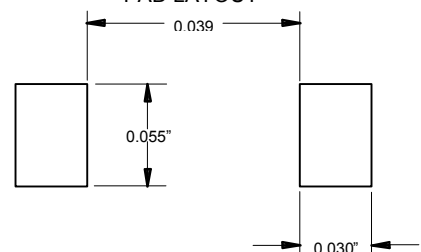


MCL4148

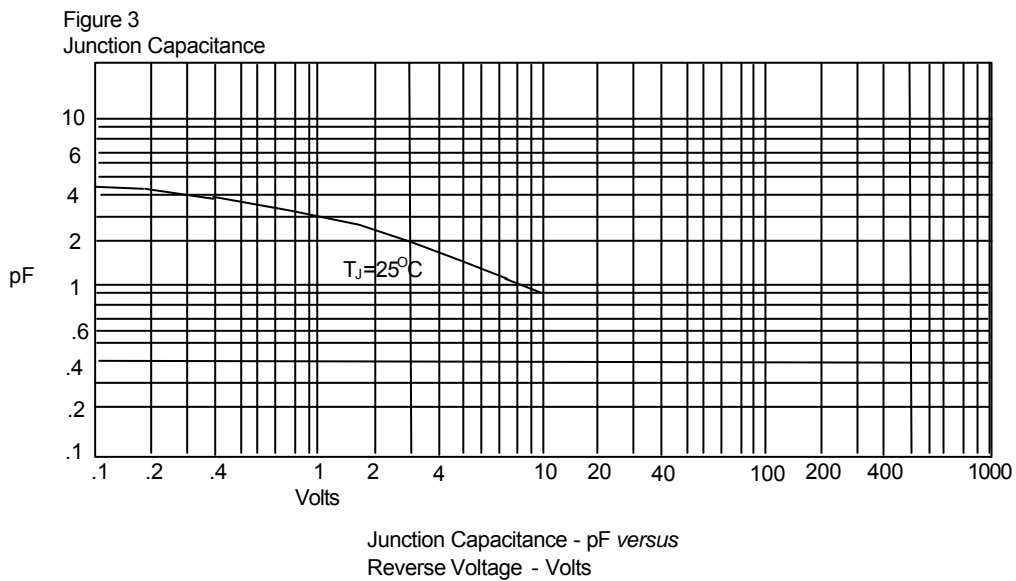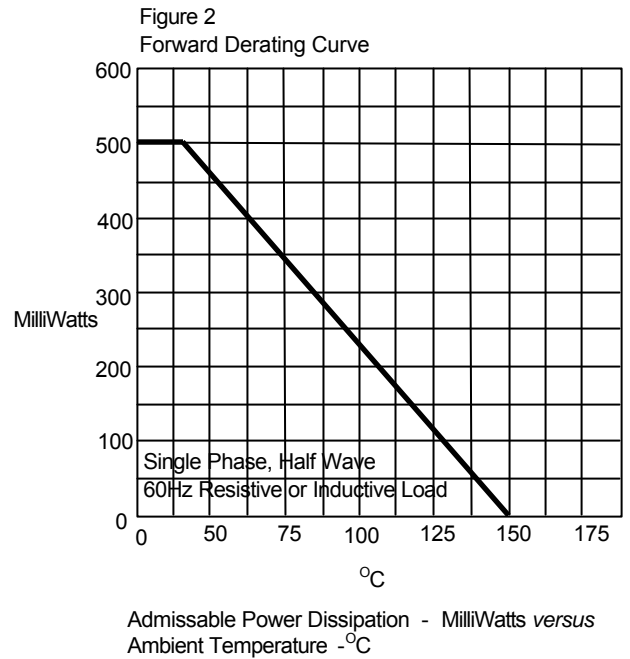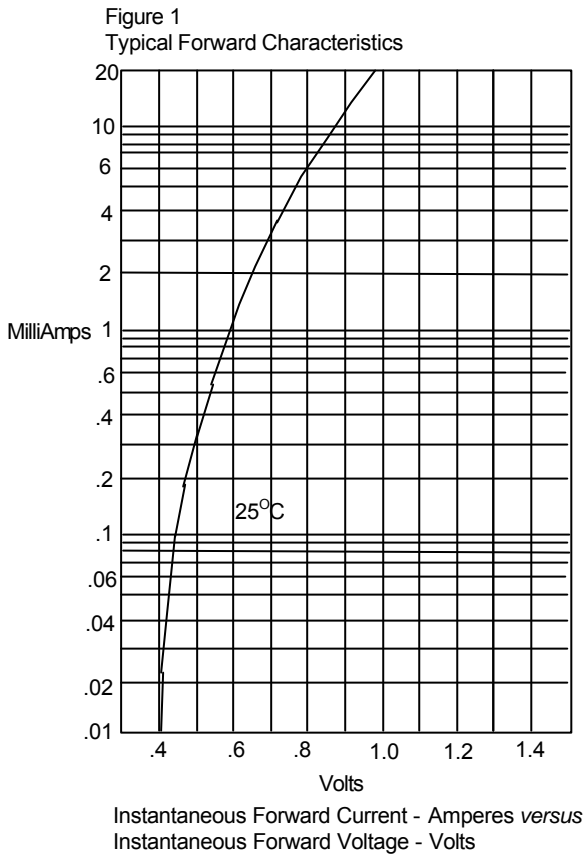


MCL4148

Figure 4
Typical Reverse Characteristics

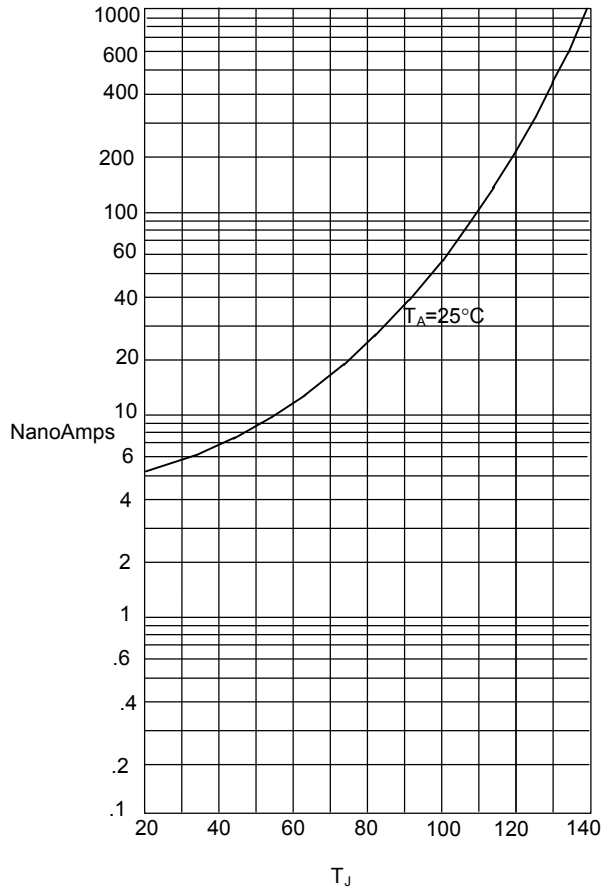

Instantaneous Reverse Leakage Current - NanoAmpere versus Junction Temperature - °C

Figure 5
Peak Forward Surge Current

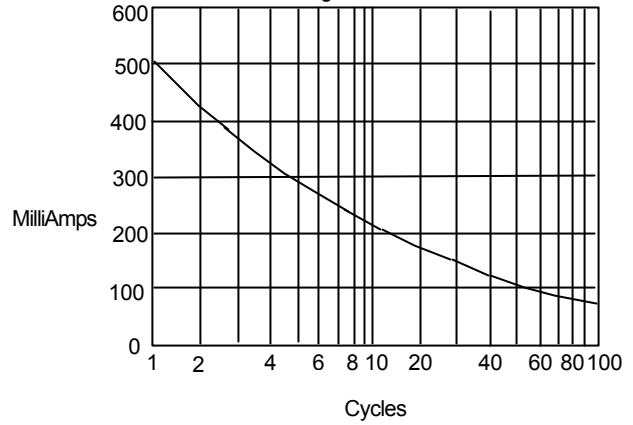

Peak Forward Surge Current - Amperes versus Number Of Cycles At 60Hz - Cycles



TM

Micro Commercial Components

Ordering Information :

Device	Packing
Part Number-TP	Tape&Reel: 2.5Kpcs/Reel

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp .** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp .** and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

www.mccsemi.com